

# 600W ROTARY HAMMER CORE BIT

The lightweight 600W Hammer Drill Bit can drill a large hole with ease.



## Features


- Lightweight hammer drills efficiently convey their power to the blade edge, allowing quick large-hole drilling.
- An SDS shank enables use with various lightweight hammer drills.
- The center pin realizes accurate center positioning.

## Applications

- Drills holes into non-reinforced concrete, block, brick, etc.

## Specifications

- Diameter: 1" - 3-7/8" (ø25-100mm)
- Cutter Length: 4-1/8" (105mm)
- Compatible Drills: Rotary hammer drills with SDS-plus chuck

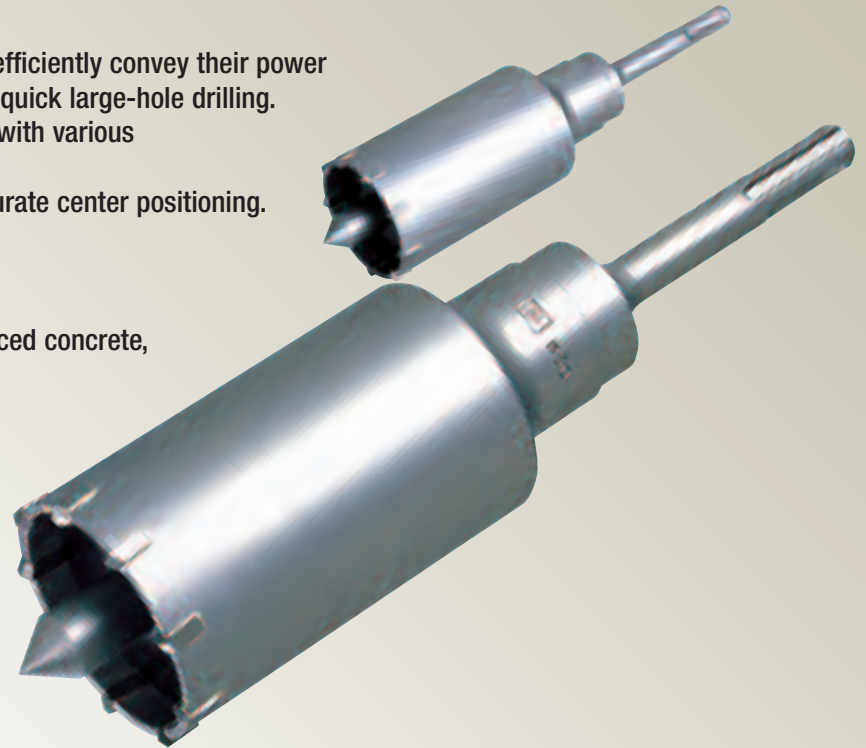

ROTARY HAMMER CORE BIT

# 1200W ROTARY HAMMER CORE BIT

When attached to heavy-duty hammer drills, the 1200W can easily drill a hole into reinforced concrete, etc.



## Features

- Heavy-duty hammer drills efficiently convey their high power to the blade edge, enabling quick drilling - even into reinforced concrete.
- The center pin realizes accurate center positioning.
- SDS MAX shank and SPLINE shank available.

## Applications

- Drills holes into reinforced concrete, etc.

## Specifications

- Diameter: 1" - 5-7/8" (ø25-150mm)
- Cutter Length: 5-7/8" (150mm)
- Compatible Drills: Heavy-duty rotary hammer drills with SDS MAX or SPLINE chuck



# ROTARY HAMMER CORE BIT



## 600W Specifications

### 600W Thin Wall Rotary Hammer Core Bit

Diameter		Part Number	Guide Plate	Shank (SDS-Plus)		Center Pin
mm	inch			8"	12"	
25	1	600W25C	600WGP25C	600WSK1200	600WSK1300	600WCP0
29	1-1/8	600W29C	600WGP29C	600WSK1200	600WSK1300	600WCP0
32	1-1/4	600W32C	600WGP32C	600WSK1200	600WSK1300	600WCP1
35	1-3/8	600W35C	600WGP35C	600WSK1200	600WSK1300	600WCP1
38	1-1/2	600W38C	600WGP38C	600WSK1200	600WSK1300	600WCP1
45	1-3/4	600W45C	600WGP45C	600WSK2200	600WSK2300	600WCP2
50	2	600W50C	600WGP50C	600WSK2200	600WSK2300	600WCP2
65	2-3/4	600W65C	600WGP65C	600WSK2200	600WSK2300	600WCP2
80	3-1/8	600W80C	600WGP80C	600WSK2200	600WSK2300	600WCP2
90	3-1/2	600W90C	600WGP90C	600WSK2200	600WSK2300	600WCP2
100	3-7/8	600W100C	600WGP100C	600WSK2200	600WSK2300	600WCP2

### Maximum Depth Capability

Shank to be Used	Overall Set Length		Maximum Depth Capability	
	mm	inch	mm	inch
600WSK1200	285	11-1/4"	225	8-3/4"
600WSK1300	385	15-1/8"	325	12-3/4"
600WSK2200	275	12-3/4"	215	8-1/2"
600WSK2300	375	14-3/4"	315	12-3/8"

## 1200W Specifications

### 1200W Thick Wall Rotary Hammer Core Bit

Diameter		Part Number	Guide Plate	Shank				Center Pin
mm	inch			MAX		SPLINE		
				12"	18"	12"	18"	
38	1-1/2	MH38C	MHGP38C	MHSK2MX	MHSK2450MX	MHSK2SP	MHSK2450SP	MHCP2
45	1-3/4	MH45C	MHGP45C	MHSK2MX	MHSK2450MX	MHSK2SP	MHSK2450SP	MHCP2
50	2	MH50C	MHGP50C	MHSK2MX	MHSK2450MX	MHSK2SP	MHSK2450SP	MHCP2
65	2-3/4	MH65C	MHGP65C	MHSK2MX	MHSK2450MX	MHSK2SP	MHSK2450SP	MHCP2
80	3-1/8	MH80C	MHGP80C	MHSK2MX	MHSK2450MX	MHSK2SP	MHSK2450SP	MHCP2
90	3-1/2	MH90C	MHGP90C	MHSK2MX	MHSK2450MX	MHSK2SP	MHSK2450SP	MHCP2
100	3-7/8	MH100C	MHGP100C	MHSK2MX	MHSK2450MX	MHSK2SP	MHSK2450SP	MHCP2
130	5	MH130C	MHGP130C	MHSK2MX	MHSK2450MX	MHSK2SP	MHSK2450SP	MHCP2
150	5-7/8	MH150C	MHGP150C	MHSK2MX	MHSK2450MX	MHSK2SP	MHSK2450SP	MHCP2

### Maximum Depth Capability

Shank to be Used	Overall Set Length		Maximum Depth Capability	
	mm	inch	mm	inch
MHSK2MX	410	16-1/8"	305	12"
MHSK2SP	410	16-1/8"	305	12"
MHSK2450MX	560	22"	455	17-7/8"
MHSK2450SP	560	22"	455	17-7/8"

 **MIYANAGA America Corp.**

40 Shuman Blvd., Suite 160  
Naperville, Illinois 60563 USA  
Tel: (630) 778-3496 Fax: (630) 778-3509

**MIYANAGA CO., LTD**  
Registered Office and Factory - Japan  
Representative Office - Europe

ISO 9001/ISO14001 Certified

[www.miyanagaamerica.com](http://www.miyanagaamerica.com)

